


**Einsteckschloss für Rohrrahmentüren
mit Rolle in der Falle**

**Mortise lock for metal frame doors with
roller in latch bolt**

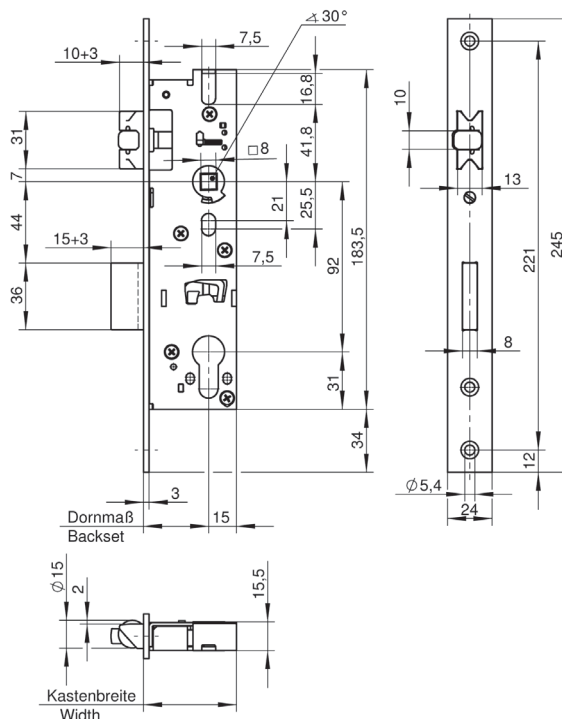

Art. Nr./Art. No.	1422					
Dornmaße/Backsets	mm	25	30	35	40	45
Kastenbreiten/Widths	mm	40	45	50	55	60

Einsteckschloss für Rohrrahmentüren mit Rolle in der Falle, für Profilzylinder vorgerichtet, komplett verzinkt, 8mm Nuss einteilig, mit Wechsel, Falle 3mm vorstehend, 1-tourig = 15mm Riegelausschluss, Schlosskasten oben und unten geschlossen, durchgehende Schraublöcher. Geprüft nach EN 12 209.

Sonderausführungen

- Riegel 3 mm oder 5 mm vorstehend
- Stulp Edelstahl rostfrei, Falle und Riegel vernickelt
- Flachstulp 22 mm
- U-Stulp 22mm oder 24 mm
- vorgerichtet für Schweizer Rundzylinder (RZ 22)
- Riegelüberwachung inkl. 10m Kabel
- Nussüberwachung inkl. 8m Kabel
- Nuss 9 mm oder 10 mm

Mortise lock for metal frame doors with roller in latch bolt, prepared for profile cylinder, fully zinc plated, solid follower 8mm, with action of the key on the latch bolt, latch bolt 3mm extended, 1 turn = 15mm dead bolt throw, top and bottom of lock case closed, end-to-end screw holes. Certified as per EN 12 209.

Special designs

- dead bolt extended 3mm or 5mm
- forend stainless steel, latch bolt and dead bolt nickel-plated
- flat forend 22 mm
- U-shaped forend 22 mm or 24 mm
- prepared for RZ 22 (Swiss standard)
- dead bolt monitoring device including 10m cable
- follower monitoring device including 8m cable
- follower 9 mm or 10 mm