




**Einsteckschloss  
für Rohrrahmenüren**

**Mortise lock  
for metal frame doors**

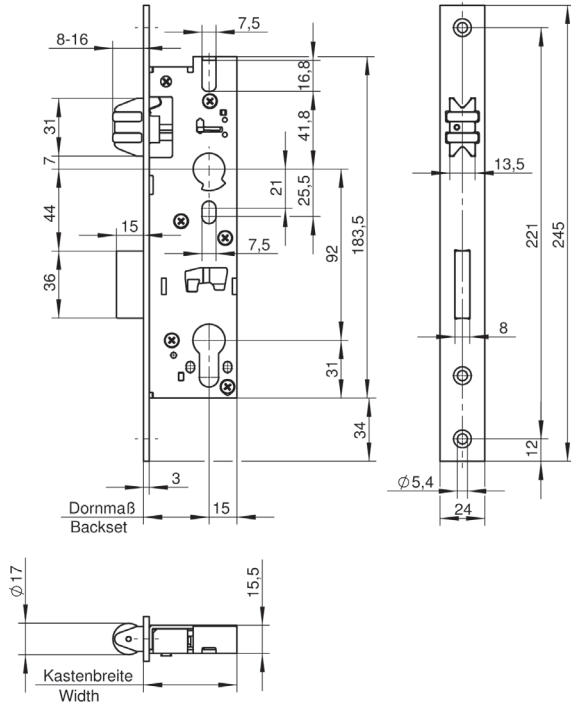

**Rohr-  
rahmen-  
schlösser**



Art. Nr./Art. No.		1432				
Dornmaße/Backsets	mm	25	30	35	40	45
Kastenbreiten/Widths	mm	40	45	50	55	60

Einsteckschloss mit Rollfalle, für Profilzylinder vorgerichtet, komplett verzinkt, Einstellbereich der Falle 8-16 mm, 1-tourig = 15 mm Riegelausschluss, Schlosskasten oben und unten geschlossen, durchgehende Schraublöcher. Geprüft nach EN 12 209.

**Sonderausführungen**

- Riegel 3 mm oder 5 mm vorstehend
- Stulp Edelstahl rostfrei, Falle und Riegel vernickelt
- Flachstulp 22 mm
- U-Stulp 22 mm oder 24 mm
- vorgerichtet für Schweizer Rundzylinder (RZ 22)
- Riegelüberwachung inkl. 10 m Kabel

Mortise lock with roller bolt, prepared for profile cylinder, fully zinc plated, adjustment range of latch bolt 8-16 mm, 1 turn = 15 mm dead bolt throw, top and bottom of lock case closed, end-to-end screw holes. Certified as per EN 12 209.

**Special designs**

- dead bolt extended 3 mm or 5 mm
- forend stainless steel, latch and dead bolt nickel plated
- flat forend 22 mm
- U-shaped forend 22 mm or 24 mm
- prepared for RZ 22 (Swiss standard)
- dead bolt monitoring device including 10 m cable